

# Pure-Fit® SIB® Smooth Inner Bore Systems

#### **Seamless Transitions**

Pure-Fit\* SIB\* is a smooth inner bore (SIB) hose-barb connector that provides a seamless transition between tubing and fittings throughout the fluid path. Pure-Fit SIB eliminates entrapment and leak points that can occur with traditional assembly systems. The unique internal design eliminates voids or dead space that can lead to turbulence or stagnation of fluid flow creating the potential for bacterial growth.

### **Maintain Fluid Integrity**


Available in both animal-free polypropylene (PP) and polyvinylidene fluoride (PVDF) materials, Pure-Fit\* SIB\* provides a seamless transition that maintains complete fluid integrity when used with Saint-Gobain's Sani-Tech\*, C-Flex\* and PharMed\* flexible tubing.

#### **Leak-free Connections**

Pure-Fit SIB fittings are fully compatible with Pure-Fit and BarbLock retainers that provide complete 360° compression for leak-free connections.

### **Biocompatibility**

Pure-Fit\* SIB\* fitting systems meet all USP Class VI and ISO criteria and have been physically tested to meet the most demanding applications and stringent test protocols.

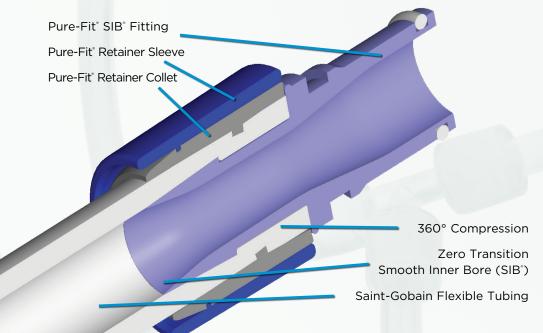



### Features/Benefits

- Total smooth inner bore (SIB) transition design
- Eliminates entrapment and leak points that occur with traditional fitting systems
- Complete 360° compression along the entire fitting system
- No excessive voids at the interface or in the fluid path
- Utilizes the patented BarbLock retention and seal system
- Compatible with Saint-Gobain Sani-Tech, C-Flex and PharMed flexible tubing
- PP is gamma stable
- PVDF is autoclaveable and gamma stable
- All materials completely animal-free and BPA-free
- Manufactured and packaged in a certified clean room
- USP VI compliant
- Validation guide available

### **Typical Applications**

- Biopharmaceutical manufacturing
- Media hydration
- Filtration
- Cell culture/harvest
- · Product sampling
- Downstream activities

### Pure-Fit\* SIB\* Material and Description

### **Tri-Clamp Series**

| Part Number   |                         |             | I.D.        |
|---------------|-------------------------|-------------|-------------|
| Polypropylene | PVDF                    | Description | inches (mm) |
| PFLS250PPAF   | PFLS250PPAF PFLS250PVDF |             | 1/4 (6.4)   |
| PFLS375PPAF   | PFLS375PVDF             | Tri-Clamp   | 3/8 (9.5)   |
| PFLS500PPAF   | PFLS500PVDF             | Tri-Clamp   | 1/2 (12.7)  |
| PFLS750PPAF   | PFLS750PVDF             | Tri-Clamp   | 3/4 (19.1)  |



### **Mini Series**

| Part N        | lumber      |             | I.D.        |
|---------------|-------------|-------------|-------------|
| Polypropylene | PVDF        | Description | inches (mm) |
| PFMS125PPAF   | PFMS125PVDF | Mini        | 1/8 (3.2)   |
| PFMS250PPAF   | PFMS250PVDF | Mini        | 1/4 (6.4)   |
| PFMS312PPAF   | PFMS312PVDF | Mini        | 5/16 (8)    |
| PFMS375PPAF   | PFMS375PVDF | Mini        | 3/8 (9.5)   |
| PFMS500PPAF   | PFMS500PVDF | Mini        | 1/2 (12.7)  |
| PFMS625PPAF   | PFMS625PVDF | Mini        | 5/8 (15.9)  |



### **Connector Series**

| Part N     | umber<br>PVDF | Description | I.D.<br>inches (mm) |
|------------|---------------|-------------|---------------------|
| PFC125PPAF | PFC125PVDF    | Connector   | 1/8 (3.2)           |
| PFC187PPAF | PFC187PVDF    | Connector   | 3/16 (4.8)          |
| PFC250PPAF | PFC250PVDF    | Connector   | 1/4 (6.4)           |
| PFC312PPAF | PFC312PVDF    | Connector   | 5/16 (8.0)          |
| PFC375PPAF | PFC375PVDF    | Connector   | 3/8 (9.5)           |
| PFC500PPAF | PFC500PVDF    | Connector   | 1/2 (12.7)          |



### **Reducer Series**

|                | lumber         |             | I.D.                    |
|----------------|----------------|-------------|-------------------------|
| Polypropylene  | PVDF           | Description | inches (mm)             |
| PFR062X125PPAF | PFR062X125PVDF | Reducer     | 1/16 x 1/8 (1.6 x 3.2)  |
| PFR062X250PPAF | PFR062X250PVDF | Reducer     | 1/16 x 1/4 (1.6 x 6.4)  |
| PFR125X187PPAF | PFR125X187PVDF | Reducer     | 1/8 x 3/16 (3.2 x 4.8)  |
| PFR125X250PPAF | PFR125X250PVDF | Reducer     | 1/8 x 1/4 (3.2 x 6.4)   |
| PFR187X312PPAF | PFR187X312PVDF | Reducer     | 3/16 x 5/16 (4.8 x 8.0) |
| PFR187X375PPAF | PFR187X375PVDF | Reducer     | 3/16 x 3/8 (4.8 x 9.5)  |
| PFR250X375PPAF | PFR250X375PVDF | Reducer     | 1/4 x 3/8 (6.4 x 9.5)   |
| PFR250X500PPAF | PFR250X500PVDF | Reducer     | 1/4 x 1/2 (6.4 x 12.7)  |
| PFR375X500PPAF | PFR375X500PVDF | Reducer     | 3/8 x 1/2 (9.5 x 12.7)  |
|                |                |             |                         |



### Pure-Fit\* SIB\* Material and Description

### Wye Series

| Part No       |            | Description | I.D.        |
|---------------|------------|-------------|-------------|
| Polypropylene | PVDF       | Description | inches (mm) |
| PFY125PPAF    | PFY125PVDF | Wye         | 1/8 (3.2)   |
| PFY250PPAF    | PFY250PVDF | Wye         | 1/4 (6.4)   |
| PFY312PPAF    | PFY312PVDF | Wye         | 5/16 (8.0)  |
| PFY375PPAF    | PFY375PVDF | Wye         | 3/8 (9.5)   |
| PFY500PPAF    | PFY500PVDF | Wye         | 1/2 (12.7)  |



### Tee Series

| Part Nu<br>Polypropylene | umber<br>PVDF | Description | I.D.<br>inches (mm) |
|--------------------------|---------------|-------------|---------------------|
| PFT125PPAF               | PFT125PVDF    | Tee         | 1/8 (3.2)           |
| PFT187PPAF               | PFT187PVDF    | Tee         | 3/16 (4.8)          |
| PFT250PPAF               | PFT250PVDF    | Tee         | 1/4 (6.4)           |
| PFT312PPAF               | PFT312PVDF    | Tee         | 5/16 (8.0)          |
| PFT375PPAF               | PFT375PVDF    | Tee         | 3/8 (9.5)           |
| PFT500PPAF               | PFT500PVDF    | Tee         | 1/2 (12.7)          |
| PFT750PPAF               | PFT750PVDF    | Tee         | 3/4 (19.1)          |



### **Cross Series**

| umber      |   | I.D.   |
|------------|---|--|
| PVDF       | Description                                 | inches (mm)  |
| PFX125PVDF | Cross                                       | 1/8 (3.2)  |
| PFX187PVDF | Cross                                       | 3/16 (4.8)   |
| PFX250PVDF | Cross                                       | 1/4 (6.4)  |
| PFX375PVDF | Cross                                       | 3/8 (9.5)  |
| PFX500PVDF | Cross                                       | 1/2 (12.7)   |
|            | PFX125PVDF PFX187PVDF PFX250PVDF PFX375PVDF | PVDF Description  PFX125PVDF Cross  PFX187PVDF Cross  PFX250PVDF Cross  PFX375PVDF Cross |



### **Elbow Series**

| V | Part N        | lumber     |             | I.D.        |
|---|---------------|------------|-------------|-------------|
|   | Polypropylene | PVDF       | Description | inches (mm) |
|   | PFE250PPAF    | PFE250PVDF | Elbow       | 1/4 (6.4)   |
|   | PFE375PPAF    | PFE375PVDF | Elbow       | 3/8 (9.5)   |
|   | PFE500PPAF    | PFE500PVDF | Elbow       | 1/2 (12.7)  |



## Pure-Fit\* SIB\* Material and Description

### **Retainer Series**

| Part N          | umber           |             | I.D.        |
|-----------------|-----------------|-------------|-------------|
| Polypropylene   | PVDF            | Description | inches (mm) |
| PF135062PPAF-AL | PF135062PVDF-AL | Retainer    | 1/16 (1.6)  |
| PF135125PPAF-AL | PF135125PVDF-AL | Retainer    | 1/8 (3.2)   |
| PF135187PPAF-AL | PF135187PVDF-AL | Retainer    | 3/16 (4.8)  |
| PF135250PPAF    | PF135250PVDF    | Retainer    | 1/4 (6.4)   |
| PF135312PPAF-AL | PF135312PVDF-AL | Retainer    | 5/16 (8.0)  |
| PF135375PPAF    | PF135375PVDF    | Retainer    | 3/8 (9.5)   |
| PF135500PPAF    | PF135500PVDF    | Retainer    | 1/2 (12.7)  |
| PF135750PPAF-AL | PF135750PVDF-AL | Retainer    | 3/4 (19.1)  |



### Pure-Fit SIB Typical Physical Properties

| Property  | Polypropylene      | PVDF                   |
|---|--------------------|------------------------|
| Tensile Strength<br>psi (MPa) ASTM D638-91  | 4,450 (31.0)       | 6,300 (43.3)           |
| Flexible Modulus,<br>psi (MPa) ASTM D790-92   | 140,000<br>(966.0) | 290,000<br>(2,000.0)   |
| Hardness (Shore D)<br>ASTM D2240-91   | 85                 | 78                     |
| Heat Deflection ASTM D648-82<br><sup>º</sup> F ( <sup>º</sup> C) @66psi<br><sup>º</sup> F ( <sup>º</sup> C) @264psi | 178 (81)<br>-      | 266 (130)<br>221 (105) |
| Water Absorption<br>(%) ASTM D570-81  | 0.01               | 0.03                   |
| Max. Recommended Working<br>Temperature °F (°C)   | 200 (93)           | 275 (135)              |
|   |                    |                        |

PURE-FIT' SIB' IS NOT INTENDED FOR USE AS AN IMPLANT MATERIAL

# Pure-Fit® SIB® Smooth Inner Bore Systems

Seamless Transitions for Complete Fluid Integrity



For more than four decades, Saint-Gobain and its family of companies have supplied the world with innovative, highperformance polymer products for the most demanding applications. Our tradition of excellence goes back 350 years through our parent company, Compagnie de Saint-Gobain, one of the world's top 100 industrial corporations, with operations in 64 countries. This successful corporation has been built with the single purpose of serving the customer and a commitment to quality and leadership in each of the industries served.

Saint-Gobain Performance Plastics 11590 US Highway 31 S Williamsburg, MI 49690 Tel: +1 (231) 264-0101 biopharm.saint-gobain.com Contact us today for:

Consultations • Samples • Quotes • Orders

(989) 435-9533 1-888-367-0067 biopharm.saint-gobain.com



BarbLock®, C-Flex®, PharMed®, Pure-Fit®, Sani-Tech® and SIB® are registered trademarks.

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics tubing for all intended uses. Laboratory and clinical tests must be conducted in accordance with applicable regulatory requirements in order to determine the safety and effectiveness for use of tubing in any particular application.

For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product to be free from defects in materials and workmanship. Our only obligation will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risk, if any, including the risk of injury, loss or damage, direct or consequential, arising out of the use, misuse, or inability to use, this product. THIS WARRANTY IS IN LIEU OF THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. No deviation is authorized.

Saint-Gobain Performance Plastics Corporation assumes no obligations or liability for any advice furnished by it, or for results obtained with respect to those products. All such advice is given and accepted at the buyer's risk.