

Saint-Gobain Life Sciences – Bioprocess Solutions



Features / Benefits

- Available as manifold system
- Top or bottom drain
- Recirculation loops and sampling systems
- 2D, 3D, and liner designs for cylindrical tanks
- Sealable, weldable tubing on standard designs
- Needle-free sampling ports
- Small volume bags with integrated hanging capability and handle (2L 2OL)
- Standard or custom designs available

Typical Applications

- Buffer and media storage
- Bioreactor feed and harvest
- Intermediate product hold
- Chromatography feed
- Fraction collection
- Final product hold




Bioprocess Bags

For single-use bioprocess systems

Saint-Gobain is a leading global supplier of 50 mL to 3,000 L single-use bags for the biopharmaceutical industry. Our single-use bags are constructed of a multilayer film optimized for bioprocess production applications. The film materials are consistent throughout the product range, with LLDPE as the fluid contact material and EVOH as the gas barrier layer. All standard products are free of animal derived components.

Saint-Gobain BioProcess Systems are manufactured following cGMP that is QSR and ISO 9001 : 2015 compliant. Bags are manufactured and assembled at our Plymouth, MN, USA, Hangzhou, China, and Bangalore, India, facilities that operate certified ISO Class 7 cleanrooms. Our standard designs are ready to fit a range of bioprocess functions, or we can deliver custom products to meet your exacting needs.

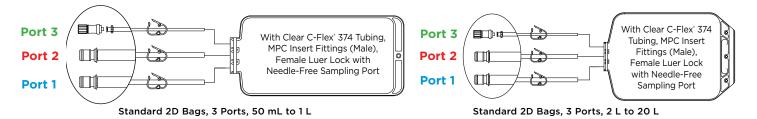

Standard 2D Bags, 3 Ports, 50 mL to 20 L


6" Tubing Length, All Ports

| Part # | Description | Tubing | Dimensions LxW in (cm) | Internal Surface Area in ² (cm ²) | Port 1 | Port 2 | Port 3 | Qty/ Box |
|---------|----------------------------|--------|---|---|---|---|--|-------------|
| BP0050M | 50 mL Bag, STD 3 ports | | 5.22 x 3.85 (13.26 x 9.78) | 26.00 (167.74) | | | | 20 |
| BP0150M | 150 mL Bag, STD 3 ports | | 7.72 x 3.85 (19.61 x 9.78) | 43.50 (280.64) | | | 1/8" x 1/4" x 6" (3.175 mm x 6.35 mm | 20 |
| BP0250M | 250 mL Bag, STD 3 ports | | 9.72 x 3.85 (24.69 x 9.78) | 57.00 (367.74) | 1/4" x 7/16" x 6" (6.35 mm x | 1/4" x 7/16" x 6" (6.35 mm x | x 15.24 cm) LL Female + Needle- | 20 |
| BP0500M | 500 mL Bag, STD 3 ports | | 10.22 x 5.35 (25.96 x 13.59) | 86.21 (556.13) | 11.11 mm x 15.24 cm) MPC Insert. | 11.11 mm x 15.24 cm) MPC Insert. | Free Sampling Port, Luer Cap, Pinch Clamp | 20 |
| BP0001L | 1 L Bag, STD 3 ports | Clear | 13.50x 6.48" (34.29 x 16.46) | 145.42 (935.48) | Port Cover, Pinch Clamp | Port Cover, | | 20 |
| BP0002L | 2 L Bag, STD 3 ports | 374 | C-Flex* 374 15.55 x 9.35 226.40 (39.37 x 23.75) (1458.06) | | 20 | | | |
| BP0003L | 3 L Bag, STD 3 ports | | 18.05 x 9.35 (45.72 x 23.75) | 271.40 (1748.38 cm) | | | 1/8" x 1/4" x 6" (3.175 mm x 6.35 mm | 20 |
| BP0005L | 5 L Bag, STD 3 ports | | 18.34 x 12.35 (46.48 x 31.24) | 364.52 (2348.38) | 3/8" x 5/8" x 6" 3/8" x 5/8" x 6" (9.53 mm x) (9.53 mm x) 15.87 mm x) 15.87 mm x) 15.24 cm) MPC 15.24 cm) MPC | x 15.24 cm) LL Female + Needle-Free | 20 | |
| BP0010L | 10 L Bag, STD 3 ports | | 27.70 x 12.35 (70.36 x 31.24) | 587.44 (3787.09) | | Sampling Port, Luer Cap, Pinch Clamp | 10 | |
| BP0020L | 20 L Bag, STD 3 ports | | 28.12 x 18.35 (71.37 x 46.48) | 887.98 (5722.57) | Insert, Port Cover, Pinch Clamp | er, Insert, Port Cover, Pinch Clamp | | 10 |

20" Tubing Length, All Ports

| BP0050ML | 50 mL Bag, STD 3 ports | | 5.22 x 3.85 (13.26 x 9.78) | 26.00 (167.74) | | | 1/8" x 1/4" x 20" (3.175 mm x 6.35 mm x 50.80 cm) LL Female + Needle- Free Sampling Port, Luer Cap, Pinch Clamp | 20 |
|----------|----------------------------|----------------------------|----------------------------------|------------------------|--|--|--|----|
| BP0150ML | 150 mL Bag, STD 3 ports | | 7.72 x 3.85 (19.61 x 9.78) | 43.50 (280.64) | | | | 20 |
| BP0250ML | 250 mL Bag, STD 3 ports | | 9.72 x 3.85 (24.69 x 9.78) | 57.00 (367.74) | 1/4" x 7/16" x 20" (6.35 mm x | 1/4" x 7/16" x 20" (6.35 mm x 11.11 mm x 50.80 cm) MPC Insert, Port Cover, Pinch Clamp | | 20 |
| BP0500ML | 500 mL Bag, STD 3 ports | | 10.22 x 5.35 (25.96 x 13.59) | 86.21 (556.13) | 11.11 mm x 50.80 cm) MPC Insert, | | | 20 |
| BP0001LL | 1 L Bag, STD 3 ports | Clear | 13.50x 6.48" (34.29 x 16.46) | 145.42 (935.48) | Port Cover, Pinch Clamp | | | 20 |
| BP0002LL | 2 L Bag, STD 3 ports | C-Flex [®] 374 | 15.55 x 9.35 (39.37 x 23.75) | 226.40 (1458.06) | | | 1/8" x 1/4" x 20" (3.175 mm x | 20 |
| BP0003LL | 3 L Bag, STD 3 ports | | 18.05 x 9.35 (45.72 x 23.75) | 271.40 (1748.38 cm) | | | | 20 |
| BP0005LL | 5 L Bag, STD 3 ports | - | 18.34 x 12.35 (46.48 x 31.24) | 364.52 (2348.38) | 3/8" x 5/8" x 20" (9.53 mm x | 3/8" x 5/8" x 20" (9.53 mm | 6.35 mm x 50.80 cm) LL Female + Needle- | 20 |
| BP0010LL | 10 L Bag, STD 3 ports | | 27.70 x 12.35 (70.36 x 31.24) | 587.44 (3787.09) | 15.87 mm x 50.80 cm) MPC Insert. | x 15.87 mm x 50.80 cm) MPC Insert, | Free Sampling Port, Luer Cap, Pinch Clamp | 10 |
| BP0020LL | 20 L Bag, STD 3 ports | | 28.12 x 18.35 (71.37 x 46.48) | 887.98 (5722.57) | Port Cover, Pinch Clamp | Port Cover, Pinch Clamp | | 10 |

Standard 2D Bags, 2 Ports, 50 mL to 500 mL

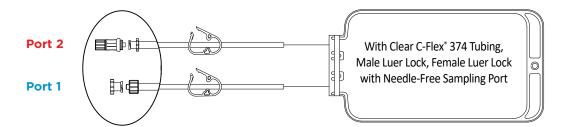

12" Tubing Length, Both Ports

| Part # | Description | Tubing | Dimensions LxW in (cm) | Internal Surface Area in ² (cm ²) | Port 1 | Port 2 | Qty/Box |
|----------|----------------------------|----------------|---------------------------------|---|-------------------------------------|--|---------|
| BP0050MS | 50 mL Bag, STD 2 ports | Clear | 5.22 x 3.85 (13.26 x 9.78) | 26.00 (167.74) | 1/8" x 1/4" x 12" (30.48 cm) | | 20 |
| BP0150MS | 150 mL Bag, STD 2 ports | | 7.72 x 3.85 (19.61 x 9.78) | 43.50 (280.64) | | 1/8" x 1/4" x 12" (30.48 cm) Female Luer, Needle-Free Site, Luer Thread Cover, Pinch Clamp | 20 |
| BP0250MS | 250 mL Bag, STD 2 ports | C-Flex* 374 | 9.72 x 3.85 (24.69 x 9.78) | 57.00 (367.74) | Male Luer, Luer Cap, Pinch Clamp | | 20 |
| BP0500MS | 500 mL Bag, STD 2 ports | | 10.22 x 5.35 (25.96 x 13.59) | 86.21 (556.13) | | | 20 |


Standard 2D and 3D Bags for Tanks, 200 L to 500 L

3D Construction

Port

With Clear C-Flex* 374



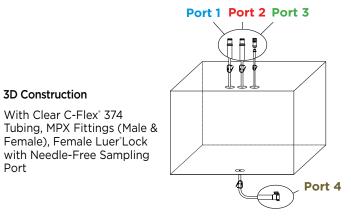

3D Bags for Rectangular Tanks 30" Tubing Length, All Ports

| Part # | Description | Dimensions LxWxH in (cm) | Tubing | Port 1 & Port 2 | Port 3 | Port 4 | Qty/ Box |
|----------|------------------------------|--|----------------|--|---|--|-------------|
| BP0200LB | 200 L 3D Bag, STD 4 ports | 30 x 22 x 22 (76.2 x 55.88 x 55.88) | Clear | 1/2" x 3/4" x 30" (12.70 mm x 19.05 mm | 1/8" x 1/4" x 30" (3.175 mm x 6.35 mm x 76.20 cm) | 1/2" x 3/4" x 30" (12.70 mm x 19.05 mm | 4 |
| BP0500LB | 500 L 3D Bag, STD 4 ports | 45.5 x 30 x 27 (111.56 x 76.2 x 68.58) | C-Flex® 374 | x 76.20 cm) MPX Insert, MPX Cap, Pinch Clamp | LL Female + Needle-Free Sampling Port, Luer Cap, Pinch Clamp | x 76.20 cm) MPX Insert, MPX Cap, Pinch Clamp | 4 |

2D Bags for Cylindrical Tanks 30" Tubing Length, Both Ports

| Part # | Description | Dimensions LxW in (cm) | Tubing | Port 1 | Port 2 | Qty/ Box |
|----------|---------------------------|---------------------------------|----------------------|---|---|-------------|
| BP0050LP | 50 L Bag, STD 2 ports | 38.5 x 21.75 (97.79 x 55.25) | | | | 10 |
| BP0100LP | 100 L Bag, STD 2 ports | 45.5 x 29.5 (111.56 x 73.66) | Clear C-Flex® 374 | 3/8" x 5/8" x 30" (9.52 mm x 15.87 mm x 76.20 cm) MPC Insert, Port Cover, Pinch Clamp | 3/8" x 5/8" x 30" (9.52 mm x 15.87 mm x 76.20 cm) MPC Insert, Port Cover, Pinch Clamp | 10 |
| BP0200LP | 200 L Bag, STD 2 ports | 58.5 x 35 (148.59 x 88.9) | | | | 10 |






ff,

ዋዋ





Port 1 Port 2 Port 3

3D Bags for Cylindrical Tanks 30" Tubing Length, All Ports

With Clear C-Flex^{*} 374 Tubing, MPC Insert Fittings (Male)

Bottom Drain Available

2D Pillow Construction

| Part # | Description | Dimensions LxWxH in (cm) | Tubing | Port 1 | Port 2 | Port 3 | Qty/ Box | |
|----------|---------------------------------|---|----------------------|---|---|-------------------------------------|-------------------------------------|---|
| BP0050LD | 50 L 3D Bag, STD 3 ports | 11 x 11 x 27.5 (27.94 x 27.94 x 69.85) | | | | | 10 | |
| BP0100LD | 100 L 3D Bag, STD 3 ports | 15 x 15 x 30.5 (38.1 x 38.1 x 77.47) | - | | | 1/8" × 1/4" × 30" | 10 | |
| BP0200LD | 200 L 3D Bag, STD 3 ports | 17.5 x 17.5 x 41 (44.45 x 44.45 x 104.14) | Clear C-Flex* 374 | 1/2" x 3/4" x 30" (12.7 mm x 19.05 mm x 76.20 cm) | 1/2" x 3/4" x 30" (12.7 mm x 19.05 mm x 76.20 cm) | (3.18 mm x 6.35 mm x 76.20 cm) | 10 | |
| BP0300LD | 300 L 3D Bag, STD 3 ports | 19 x 19 x 52.5 (48.26 x 48.26 x 133.35) | | | 8.26 | MPX Insert, MPX Cap, Pinch Clamp | MPX Insert, MPX Cap, Pinch Clamp | Sampling Port, Luer Cap, Pinch Clamp |
| BP0500LD | 500 L 3D Bag, STD 3 ports | (99.70 x 99.70 | | | | | 4 | |

Standard 3D Liners for Cylindrical Tanks, 20 L to 500 L

| Part # | Description | LxWxH When Laid Flat in (cm) | Fits Tank with ODxH in (cm) | Qty/ Box |
|---------|---------------------|---|--------------------------------|-------------|
| LR0020L | 20 L Liner, STD 3D | 21 x 19.5 x 15.25 (53.34 x 49.53 x 38.43) | 11 x 15 (27.9 x 38.1) | 20 |
| LR0050L | 50 L Liner, STD 3D | 34 x 25 x 27.75 (86.36 x 63.5 x 70.18) | 13 x 27 (33 x 68.6) | 20 |
| LR0100L | 100 L Liner, STD 3D | 36 x 32.5 x 30 (91.44 x 82.55 x 76) | 18 x 30 (45.7 x 76.2) | 20 |
| LR0200L | 200 L Liner, STD 3D | 42 x 38.5 x 36.25 (106.68 x 97.79 x 91.77) | 22 x 36 (55.9 x 91.4) | 10 |
| LR0300L | 300 L Liner, STD 3D | 54 x 41 x 48 (137.16 x 104.14 x 122.10) | 24 x 48 (61 x 121.9) | 10 |
| LR0400L | 400 L Liner, STD 3D | 51 x 48 x 44.25 (129.54 x 121.92 x 112.40) | 28 x 44 (71.1 x 111.8) | 10 |
| LR0500L | 500 L Liner, STD 3D | 68 x 54 x 49.5 (172.72 x 137.16 x 125.25) | 31 x 49 (78.7 x 124.5) | 10 |



Multilayer Film Structure

Saint-Gobain single-use bags are constructed of multilayer film optimized for bioprocess production applications. Film materials are consistent throughout the product range, and are free of materials of animal origin. Offering outstanding biocompatibility, chemical compatibility, barrier and strength properties, Saint-Gobain films meet the most demanding bioprocess applications.

Fluid Contact Layer - Linear Low Density Polyethylene (LLDPE)

Provides outstanding biocompatibility with broad chemical compatibility for safe handling of a wide range of biopharmaceutical liquids.

Gas Barrier Layer- Ethyl Vinyl Alcohol (EVOH)

Provides excellent barrier to the transmission of oxygen and carbon dioxide.

Strength Layer - Nylon


Provides outstanding impact and tear resistance, optimizing overall toughness of the bag.

Tie Structure

Multiple materials provide bonding between layers and add to overall performance of the bag.

Film Thickness

Liners: 5 mil (side-wall) / 7 mil (bottom) 50 mL to 1 L bags: 7 mil 2 L to 3000 L bags: 12 mil

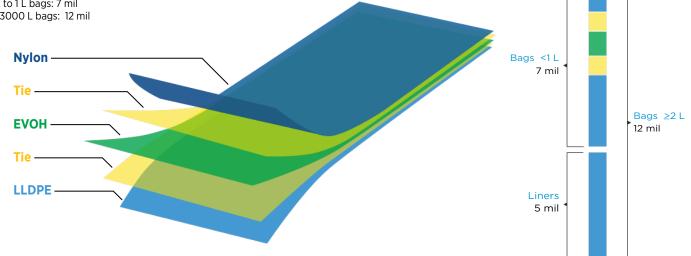

Physical Properties

| | ASTM ¹ | Units | Typical Value |
|---|-------------------|--------------|---------------|
| Thickness 50 mL - 1 L Chamber 2 L - 500 L Chamber | N/A N/A | mils mils | 7.0 12.0 |
| Tensile Strength (MD) | D882A | psi | 5300 |
| Tear Resistance | D1922 | grams | >800 |
| Seam Strength | D882 | lbs/in | >25 |
| Dart Impact | D1709 | grams | >1600 |
| Operating Temperature | N/A | °C | -80 to +60 |
| O ₂ Transmission Rate | D3985 | cc/m²/day | <0.005 |
| CO ₂ Transmission Rate | F2476 | cc/m²/day | <1.0 |
| Water Vapor Transmission Rate | F1249 | g/m²/day | 2.66 to 2.68 |

Biological & Particulate Testing

| | Test Protocol | Result |
|------------------------------------|---------------|--------|
| Genotoxicity Test | ISO 10993-3 | Pass |
| Bacterial Endotoxin | USP <85> | Pass |
| Subvisible Particulate | USP<788> | Pass |
| Bioburden | ISO 11737-1 | Pass |
| Physicochemical Tests for Plastics | USP <661> | Pass |

Bioprocess bags meet the requirements of USP <88> Class VI, and/or USP <87>, and/or ISO 10993-5.

(1) ASTM test results reported using 7.0 mil chamber construction

Sterilization

| | Test Protocol | Result |
|---|---------------------|------------------------------|
| Microbiological Validation of 25kGy Radiation Sterilization | ANSI/AAMI/ISO 11137 | 10⁻⁵ SAL 3 Year Expiry |

All part numbers referenced in this document are individually double-pouched within their case and gamma irradiated at 25-40kGy without sterility assurance. Custom bags can be provided with no gamma irradiation, with gamma irradiation, or with gamma irradiation and SAL 10-6

Validation and Extractables

Saint-Gobain single-use bags have been qualified using widely accepted test methods. Complete validation and testing information can be found by visiting biopharm.saint-gobain.com/technical-and-validation



Saint-Gobain Life Sciences

15301 Highway 55 Plymouth, MN 55447 Tel: (763) 398-1560 Fax: (763) 398-1589

108 10th Hi-Tech Rd Hangzhou, CN-33 Zhejiang 311231 China

Grindwell Norton Limited Devanahalli Road Off Old Madras Road Bangalore, India 560049

www.biopharm.saint-gobain.com

C-Flex® is a registered trademark of Saint-Gobain Performance Plastics

Uncontrolled Document - for the controlled version of this document please visit <u>www.biopharm.saint-gobain.com</u>

Contact us today for:

Consultations • Samples • Quotes • Orders • On-Time Deliveries

For registered access to Saint-Gobain Product Validation Summaries, CLICK HERE

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics products for all intended uses and that the materials to be used comply with all applicable medical regulatory requirements. Saint-Gobain Performance Plastics assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product to be free of defects in materials and workmanship. Our only obligation will be to replace any portion proving defective, or at our option, to refund the purchase price thereof.

SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.